


**STANDARDS COMMITTEE FOR  
HI-LOK® HI-TIGUE® PRODUCTS**  
2600 SKYPARK DRIVE, TORRANCE, CALIFORNIA 90509

HI-SHEAR CORPORATION, U.S.A. (Patent Holder) U.S. Federal Code I.D. No. 73197  
 Division of Hi-Shear Industries Inc., U.S.A.  
 AIRCRAFT FASTENERS (Forged Parts) LTD., U.K. (Licensee)  
 Division of Hi-Shear Industries Inc., U.S.A.  
 VSI-SHAM, Division of VSI Corp., U.S.A. (Licensee) U.S. Federal Code I.D. No. 92215  
 SPS TECHNOLOGIES, U.S.A. (Licensee) U.S. Federal Code I.D. No. 96878  
 LITTON FASTENING SYSTEMS, U.S.A. (Licensee) U.S. Federal Code I.D. No. 97828  
 Division of Litton Systems Inc., U.S.A.

ST. CHAMOND-GRANAT, S.A. France (Licensee—EEC Countries)  
 KAMAX-WERKE, Germany (Licensee—EEC Countries)  
 Rudolf Keilerman GmbH & Co. (Licensee—EEC Countries)  
 SIMMONDS, S.A. France (Licensee—EEC Countries—Collars)  
 TOKYO SCREW COMPANY, Japan (Licensee—Japan)  
 WEST COAST AEROSPACE INC., U.S.A. (Licensee—Oversize Pins & Steel Collars)  
 U.S. Federal Code I.D. No. 60516

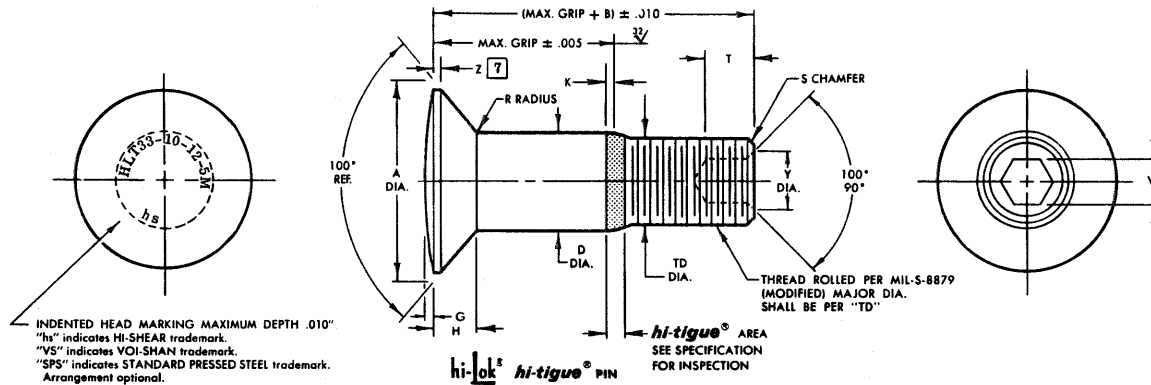


FIRST DASH NO.	NOM. DIA.	A DIA.	B REF.	D DIA.	TD DIA.	F	G	H	K REF.	R RAD.	Z MAX.	S CHAMFER REF.	THREAD	SOCKET			DOUBLE SHEAR POUNDS MINIMUM	TENSION POUNDS MINIMUM
														W HEX.	T DEPTH	Y DIA.		
-6	3/16	.3813	.303	.1895	.1840	.005	.015	.0805	.016	.030	.015	1/32" x 45°	10-32UNJF-3A Modified	.0806	.100	.119	7,060	4,350
		.3765		.1890	.1810		.010	.0785		.020				.0791	.080	.104		
-8	1/4	.5066	.352	.2495	.2440	.006	.015	.1090	.021	.030	.015	1/32" x 45°	1/4-28UNJF-3A Modified	.0967	.110	.142	12,260	7,750
		.5018		.2490	.2410		.010	.1060		.020				.0947	.090	.122		
-10	5/16	.6335	.406	.3120	.3060	.007	.015	.1350	.026	.040	.015	3/64" x 45°	5/16-24UNJF-3A Modified	.1295	.130	.180	19,160	12,300
		.6287		.3115	.3020		.010	.1330		.030				.1270	.110	.160		
-12	3/8	.7604	.431	.3745	.3680	.008	.015	.1620	.030	.040	.015	3/64" x 45°	3/8-24UNJF-3A Modified	.1617	.160	.217	27,600	19,100
		.7556		.3740	.3640		.010	.1600		.030				.1582	.140	.197		

- GENERAL NOTES:
- Head edge out of roundness shall not exceed "F."
  - Concentricity: Conical surface of head to "D" diameter within .005 FTR.
  - "H" is dimensioned from maximum "D" diameter.
  - Dimensions to be met before finish.
  - Surface texture per ANSI B46.1.
  - Hole preparation per NAS618.
  - Curved or flat edge manufacturer's option.

CODE: First dash number indicates nominal diameter in 1/32nds. Second dash number indicates maximum grip in 1/16ths. Third dash number (-5 only) indicates grip is 1/32nd longer than indicated by second dash number. "M" indicates grip is in 16ths. See "Finish" note for explanation of other code letters.

HOW TO ORDER  
EXAMPLES:

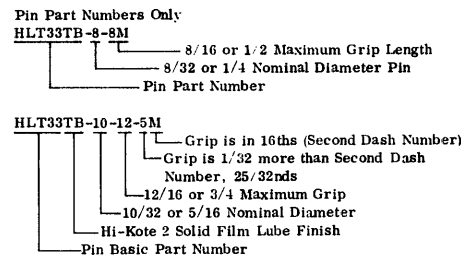

MATERIAL: PH13-8Mo stainless steel per Spec. AMS5629.

HEAT TREAT: 125,000 psi shear minimum.

FINISH: HLT33-( )-( )M = Passivate per Hi-Shear Spec. 258 and cetyl alcohol lube per Hi-Shear Spec. 305.  
 HLT33TB-( )-( )M = Hi-Kote 2 solid film lube per Hi-Shear Spec. 292 and cetyl alcohol lube per Hi-Shear Spec. 305.

① SPECIFICATION: Hi-Lok Hi-Tigue Product Specification 342.

U.S. patents 3,390,906; 3,578,367; and foreign patents. "Hi-Lok," "HL," "Hi-Tigue," and "HLT" are Registered Trademarks of Hi-Shear Corporation.

DRAWN D. P. S.	DATE 1-24-78	<b>hi-lok hi-tigue PIN</b> 100° FLUSH CROWN MS24694 TENSION HEAD - SHORT THREAD PH13-8Mo STAINLESS STEEL 1/16" GRIP VARIATION
APPROVED JCH	DATE 1-24-78	
REVISION (4)	DATE D. P. S. 6-7-84	
		DRAWING NUMBER <b>HLT33</b>